

DGHOB3/3030


Tristar B125 3 flange dished gully grate 300mm x 300mm clear opening with 75mm frame depth



RANGE	CLEAR OPENING (MM)	BASE OPENING (MM)	OVERALL FRAME (MM)	FRAME DEPTH (MM)	WATERWAY AREA (MM)	OPTIONS
Tristar	300 x 300	300 x 300	355 x 345	75	375	<input type="checkbox"/> Enhanced anti-slip coating <input type="checkbox"/> Screw locking

KEY FEATURES

- ✓ Captive hinges reduce theft risk whilst allowing easy lifting.

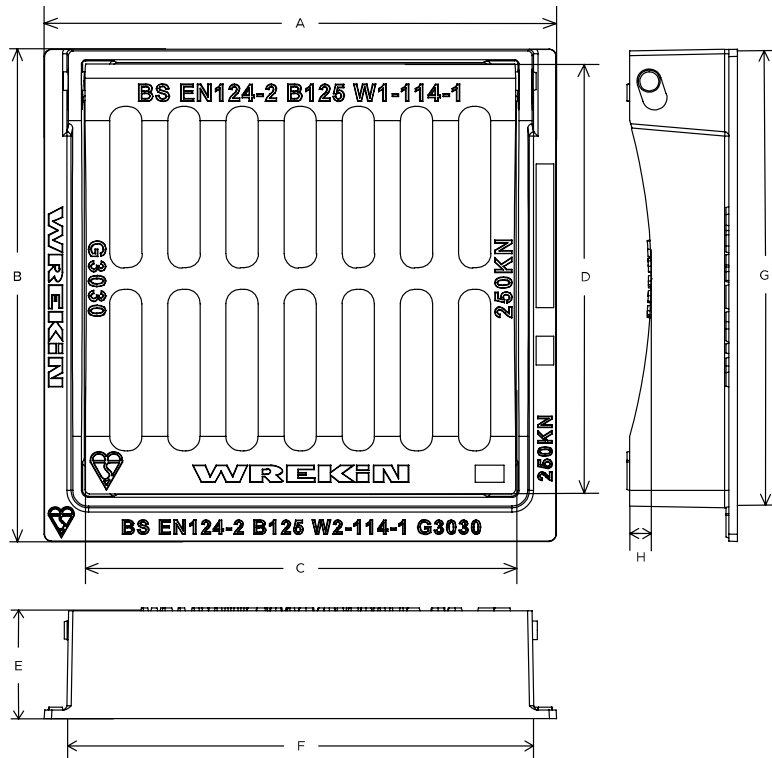

SPECIFICATION

General information

Stock code	DGH0B3/3030
Primary material	Ductile iron
Range	Tristar
Category	Gully grate
Flanges	3

Standards, classes and groupings

Standards	BS EN 124
BS EN 124 Class	B125
BS EN 124 Group	2
Third party certified	Kitemark
CD526 Hydraulic Capacity	Out of Range

Dimensions

Frame shape	Rectangular
Manhole shape	Rectangular
Overall frame (A x B)	355 mm x 345 mm
Clear opening (C x D)	300 mm x 300 mm
Frame depth (E)	75mm
Base opening (F x G)	300 mm x 300 mm
Dished depth (H)	15mm
Waterway area	375cm ²

AVAILABLE OPTIONS

✓ Enhanced anti-slip coating

An enhanced anti-slip coating provides increased anti-slip protection as an addition to the product's own anti-skid properties.

✓ Screw locking

Screw locking deters unauthorised access to the chamber. An extended shank socket set is required to engage the locking screw.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm
YPCR/U12.5	12.5Kg Unipak rapid curing polyester resin mortar
YPCR/U25	25Kg Unipak rapid curing polyester resin mortar

NOTES

- This product has a dished gully top arrangement
- All values stated are nominal within 2.5% tolerance.

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.

